



QUICSEAL 409

Product Name

uPVC GROOVE JOINT

Description

QUICSEAL 409 Groove Joint is made from high quality unplasticised polyvinyl chloride (uPVC) materials.

Ideal for forming feature groove lines in plastered walls, QUICSEAL 409 improves the quality of plastered wall finish and reduces inconsistencies due to workmanship

QUICSEAL 409 is available in a standard profile to cater to most applications in various plaster thickness.

Advantages

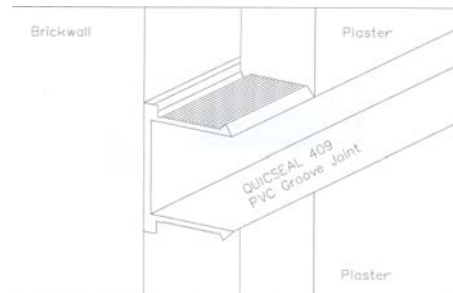
- Light weight – easy to install,
- Can be painted over directly with emulsion or solvent based paint,
- Aesthetically pleasing - enhances the quality of plastered finish,
- Good fire resistance – does not support combustion,
- Does not support fungal growth



1. QUICSEAL 409 set with mortar base

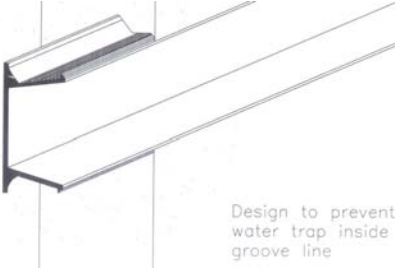



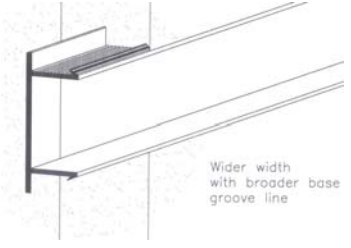







2. Plastering wall to finish flush with plasterwork trim









SECTIONAL DETAIL OF QUICSEAL 409

QUICSEAL 409 Profiles

 <p>Design to prevent water trap inside groove line</p>		
	QS SV23	Standard Length: 2m Supply Dimensions: W:23 mm x D:12mm
 <p>Designed to prevent trapping of water inside groove line</p>		
	QS GV1020	Standard Length: 2m Supply Dimensions: W:20 mm x D:10mm
 <p>Wider width with broader base groove line</p>		
	QS SC1020	Standard Length: 2m Supply Dimensions: W:20 mm x D:10mm
		
	QS GJ 6	Standard Length: 2m Supply Dimensions: W:6 mm x D: 6mm
		
	QS GJ 10	Standard Length: 2m Supply Dimensions: W: 10 mm x D: 7mm

QUICSEAL CONSTRUCTION CHEMICALS PTE LTD

		
	QS GJ 15	Standard Length:2m Supply Dimensions: W:15 mm x D:10mm
		
	QS GJ 20	Standard Length:2m Supply Dimensions: W:20 mm x D:15mm
		
	QS GJ 20A	Standard Length:2m Supply Dimensions: W:20 mm x D:10mm

Installation instruction

1. Select the groove joint profile according to requirement.
2. Measure and mark the required length of the groove joint profile accordingly.
3. Cut QUICSEAL 409 profile using a cutter. Cut edges can be smoothened by using a small file.
4. Set the QUICSEAL 409 with mortar base according to plastering depth.
5. Plaster the wall and finish flush with the plasterwork trim

Packing

Length : QUICSEAL 409 is available in lengths of 2m.

Pack size : 100 lengths per box

Important Notes

The information set forth herein is furnished in good faith and is based on technical data that QUICSEAL considers to be reliable. This information is intended for used by persons having technical skill and at their own discretion and risk. Information contained in this product sheet conforms to the standard detail recommendations and specifications for the installation of QUICSEAL products as of the date of publication of this document. QUICSEAL makes no other warranties and assumes no liability, expressed or implied, as to the architecture, engineering or workmanship of any project. To ensure that you are using the latest, most complete information, contact QUICSEAL

Reference No. QS409/120204